

## LITHIUM IRON PHOSPHATE BATTERY

### ELECTRICAL PERFORMANCE

|                  |                 |
|------------------|-----------------|
| Nominal Voltage  | 12.8 V          |
| Nominal Capacity | 200 Ah          |
| Capacity @ 40A   | 300 min         |
| Energy           | 2560 Wh         |
| Resistance       | ≤8 mΩ @ 50% SOC |
| Self Discharge   | <3% / Month     |
| Cells            | Cylindrical     |

### CHARGE PERFORMANCE

|                             |                     |
|-----------------------------|---------------------|
| Recommended Charge Current  | 40 A                |
| Maximum Charge Current      | 150 A               |
| Recommended Charge Voltage  | 14.6 V              |
| BMS Charge Cut-Off Voltage  | <15.6 V (3.9V/Cell) |
| Reconnect Voltage           | >14.0 V (3.5V/Cell) |
| Balancing Voltage           | <14.4 V (3.6V/Cell) |
| Maximum Batteries in Series | 4                   |

### DISCHARGE PERFORMANCE

|                                      |                         |
|--------------------------------------|-------------------------|
| Maximum Continuous Discharge Current | 150 A                   |
| Peak Discharge Current               | 300 A (3s)              |
| BMS Discharge Cut-Off Current        | 450 A ±20 A (31ms)      |
| Recommended Low Voltage Disconnect   | 11 V (2.75V/Cell)       |
| BMS Discharge Cut-Off Voltage        | >8.0 V (3s) (2.0V/Cell) |
| Reconnect Voltage                    | >10.8 V (2.7V/Cell)     |
| Short Circuit Protection             | 250 ~ 500 μs            |



### MECHANICAL PERFORMANCE

|                       |   |
|-----------------------|---|
| Dimension (L x W x H) | 520 x 268x 228 mm<br>20.5 x 10.6 x 9.0" |
| Approx. Weight        | 56.9 lbs (25.8 kg)                      |
| Terminal Type         | T11                                     |
| Terminal Torque       | 80 ~ 100 in-lbs (9 ~ 11 N-m)            |
| Case Material         | ABS                                     |
| Enclosure Protection  | IP65                                    |


### TEMPERATURE PERFORMANCE

|                              |                           |
|------------------------------|---------------------------|
| Discharge Temperature        | -4 ~ 149 °F (-20 ~ 65 °C) |
| Charge Temperature           | 32 ~ 113 °F (0 ~ 45 °C)   |
| Storage Temperature          | 23 ~ 95 °F (-5 ~ 35 °C)   |
| BMS High Temperature Cut-Off | 167 °F (75 °C)            |
| Reconnect Temperature        | 149 °F (65 °C)            |

### COMPLIANCE

|                         |   |
|-------------------------|---|
| Certifications          | CE (battery)<br>UN38.3 (battery)<br>UL1642 & IEC62133 (cells) |
| Shipping Classification | UN 3480, CLASS 9  |




### OUTLINE DIMENSION

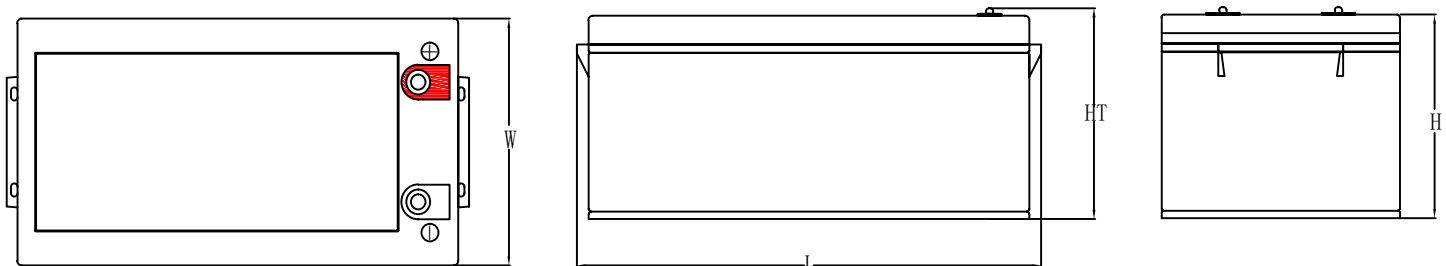


| L mm(")    | W mm(")    | H mm(")   | HT mm(")  |
|------------|------------|-----------|-----------|
| 520 (20.5) | 268 (10.6) | 221 (8.7) | 228 (9.0) |

Performance may vary depending on application. All specifications are subject to change without prior notice to the user. This data is for evaluation purposes only. No guarantee is intended or implied by this data. For clarification and updated information, please contact us.

### PERFORMANCE CHARACTERISTICS

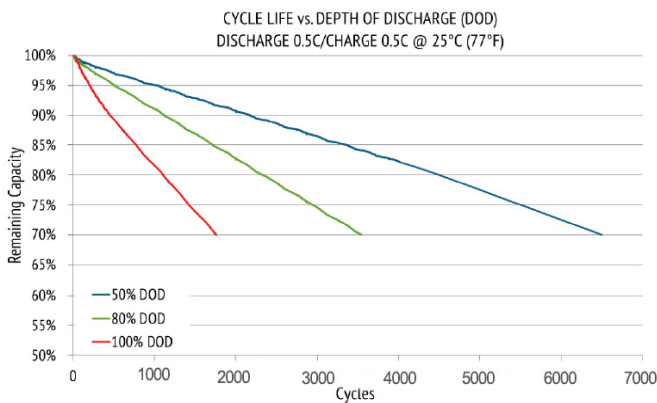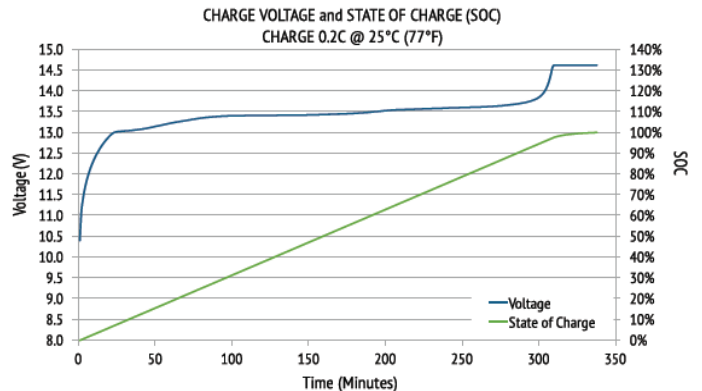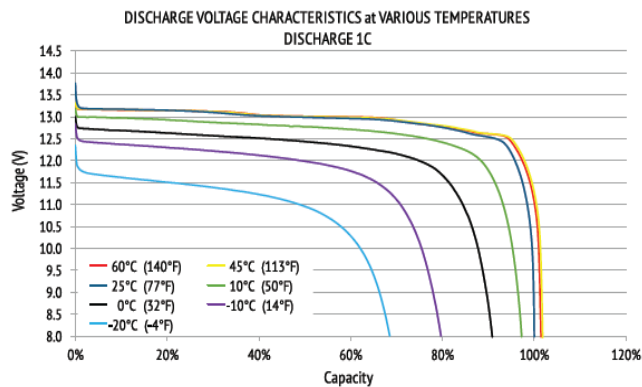

Discharge characteristic at different rate at room temperature

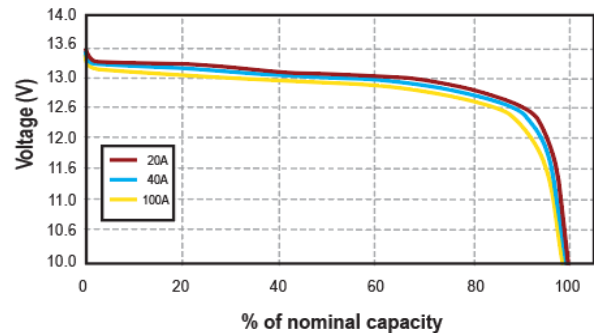

### FEATURES & BENEFITS



#### High Cycle Life

>4000 cycles @80% DoD for effectively lower total cost of ownership



#### Longer Service Life

Maintenance free batteries with safe and stable chemistry



#### BMS Technology

BMS protects battery from short circuit, high temperature, undervoltage, overloads & more.



#### Better Storage

up to 6 months thanks to its extremely low self discharge (LSD) rate and no risk of sulphation.



#### High Efficiency

Charge & Discharge Efficiency @100%



#### Extreme Heat Tolerance

Suitable for use in a wider range of applications and working temperature is from -25 C to 60 C



#### Lightweight

Light Weight 50% - 60% less weight than lead-acid batteries

### APPLICATIONS

Lithium Iron Phosphate can be used in most applications that use Lead Acid, GEL or AGM type batteries. Suitable applications include:

- Caravan
- Marine
- Golf Car
- Buggies
- Solar Storage
- Remote Monitoring
- Switching applications and more

### CAUTIONS

- Do NOT short circuit, reverse polarity, crush or disassemble.
- Do NOT heat or incinerate.
- Do NOT immerse in any liquid.
- Store at 30~50% SOC. Recharging every 3 months is recommended. The storage area should be clean, cool, dry and ventilated.

Performance may vary depending on application. All specifications are subject to change without prior notice to the user. This data is for evaluation purposes only. No guarantee is intended or implied by this data. For clarification and updated information, please contact us.